




DELTA SURGE ARRESTOR


Helps prevent Lighting & Surge Damage
 Replaces: Surge Suppressors, Surge Protectors,
 and other Surge Protective Devices (SPD)

SPECIFICATIONS	
Type of Design SPD	Metal Oxide Varistor
Maximum Current	30,000 Amps
Maximum Energy	500 Joules
Line Voltage MCOV	120 / 240 VAC
Leads	18" #12 THHN
Response Time	5 nanoseconds
VPR	150 / 300 Volts
SCCR	10k Amps
Category B & C and Type 1 & 2	
<p>SIMPLE INSTALLATION Fasten the arrestor to the service entrance equipment. Connect the black wires to the lines. Connect the white wire to the neutral and/or ground.</p>	



MO302

2 1/2" High
2 1/4" Diameter

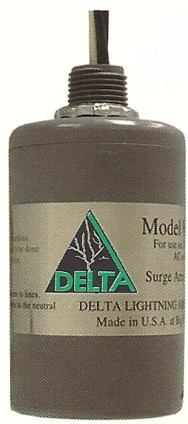

MO303

4 1/2" High
2 1/4" Diameter

1/2" Nipple
Washer & Locknut
furnished

NEMA 4 Weatherproof Enclosure
 1/2" Locknut & 1/2" x 1 reducing washer
 1/2" Standard Pipe Thread Nipple
 Case Material: PVC

MO303 120 / 208-240 VAC, Three Phase
 MO302 120 / 240 VAC, Single Phase

NEMA C62.11

Conduction Characteristics		8 x 20 microsecond wave shape ANSI IEEE NEMA STANDARD C62.11			
		1.5kA	3kA	5kA	10kA
Discharge Current					
Clamping Voltage (Line to Neutral)	.49kV	.640kV	.960kV	1.41kV	3.21kV
DELTA LIGHTNING ARRESTORS,™ INC.				P.O. BOX 750 BIG SPRING, TX 79721 432-267-1000 www.deltala.com deltala@msn.com	